

HCD Series

Desiccant Dehumidifier



Product Description

Process Air: Flow rates of 4500-12000 scfm. Nominal moisture removal: 240 lbs/hr at 75°F, 50% RH at 9000 scfm. Delivered air moisture levels of -55°F dewpoint and lower are attainable.

Contact Air Seals: Separate process and reactivation air at pressures up to 8" W.G. with 5 years life expectancy.

Process & Reactivation Fans: Centrifugal, belt or direct drive with totally enclosed fan cooled motors.

Electrical Controls: Continuous automatic operation including motor starters, overload protective devices, microprocessor with indicating lights and fault circuits. All wiring to NEC codes.

Drive System: Simple, self-tensioning drive belt arrangement, few moving parts.

Reactivation Utility: Electric with solid state proportioning control, steam with proportional air volume control or gas (direct/indirect) with modulating gas valve.

Dehumidifier Housing: Process and reactivation air flow insulation. Durable air-dry polyurethane paint. All welded aluminum cabinet.

PRODUCT INFORMATION


HCD-9000

MODULAR DEHUMIDIFIER UNITS WITH OPTIONS

Advantages:

- Weather-tight construction for indoor or outdoor use
- Low profile cassette design
- Quick access for easy maintenance
- Easy duct connections
- Modulating electric, gas or steam reactivation
- Multiple blower orientations
- Built-in bypass option
- Add-on post-/pre-air treatment options

Desiccant Rotors

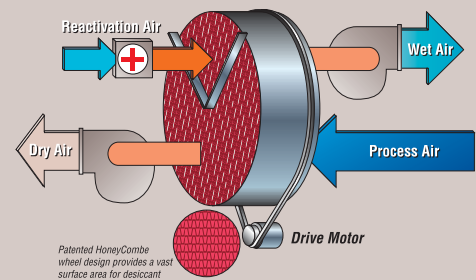

In the 1950's Munters invented modern industrial dehumidification when it introduced the self-regenerating desiccant rotor, the heart of the dehumidifier.


Today, Munters offers rotors with five desiccant formulations and is the acknowledged expert in the integration of rotors into dehumidification systems and air handlers.



The Humidity Expert

MODEL HCD-9000 – SA (STEAM)

General arrangement drawings for other electric, steam or gas reactivation units available from your local representative or factory. Below drawing for illustrative purposes, not for construction. Consult factory for certified drawings.

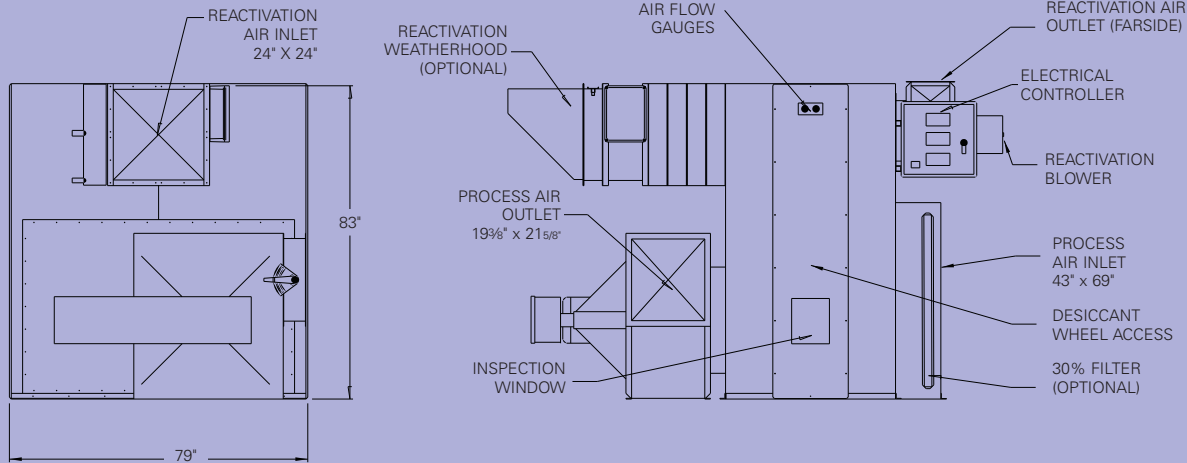

DIMENSIONS TABLE FOR SA (STEAM), EA (ELECTRIC), GA (INDIRECT GAS FIRED), AND DGA (DIRECT GAS FIRED) REACTIVATION

Model	Max Length (in.)	Max Width (in.)	Max Height (in.)	Max Weight (lbs.)	Typical/External Static Pressures (in. W.G.)	
					Process	React
HCD-9000 SA	129	79	89	2630	2.2	2.0
HCD-9000 EA	129	79	90	2430	2.0	2.0
HCD-9000 GA	169	85	95 indoor 121 outdoor	3080	2.0	2.0
HCD-9000 DGA	158	85	86	2980	1.9	0.8

Suggested Specification Guide:

Dehumidifier shall be of a type proven in satisfactory operation for a minimum of ten years. Dehumidifier shall be of the non-cycling sorption type with a single desiccant rotary structure. The casing will be fabricated as a unitized body with welded aluminum construction for maximum strength and durability. Suitable access panels on both sides of the unit shall allow access for inspection or servicing without disconnecting ducting or electrical wiring. Airflow balancing dampers to be furnished. The dehumidifier shall be designed for continuous operation.

The rotary structure shall be a monolithic fabricated extended surface composite consisting of inert silicates reinforced with uniform diameter glass fibers for maximum strength. The fabricated structure shall be smooth and continuous in the direction of airflow without interruptions or sandwich layers which restrict airflow or create a leakage path at joining surfaces. Desiccant shall not channel, cake or fracture due to repeated temperature and moisture cycling. The materials of construction shall be non-toxic and NFPA 255-ASTM E84 compliant.

The desiccant wheel shall be a single piece for fast removal and simple handling. The desiccant wheel shall be supported by four rollers at the base of the unit so the wheel

can be easily removed for maintenance by lifting it over the rollers using the drive belt. Center-axle support or any arrangement which requires disassembly of the support structure for wheel removal shall not be acceptable.

Design shall be modular in approach to readily allow connection to accessories such as face & bypass, pre- or post-cool modules.

Electrical components shall be UL/CSA recognized and wiring methods in accordance with the latest edition of the National Electric Code. Power supply shall be ___ Volts/3 Phase/___ Hertz.

Full face contact pressure seals shall be provided to separate the process and reactivation airstreams and eliminate detrimental leakage of air or moisture with static pressure differentials of up to 8" of water gauge.

Dehumidifier shall be factory assembled, fully automatic, complete with HoneyCombe desiccant wheel, reactivation heaters, reactivation energy control system, roughing filters, motors, fans, non-ratcheting desiccant drive unit, automatic controller and all components' auxiliaries. Dehumidifier shall be functionally tested at the manufacturer's factory and shipped complete with all components necessary to maintain normal operation.

*Continual engineering and research for product improvement may result in design and specification changes. Consult factory for certified technical data.

Technical Specifications*

Utilities: 208, 230, 460 or 575 Volts

Reactivation Heaters:

EA-Electric: 208-575 volts.

SA-Steam: 10-150 psig.

GA/DGA-Gas: Natural or propane 4.5 to 14" W.G. pressure.

Max Reactivation Air Volume: 2800 scfm

Reactivation Filter: Permanent and washable

Electric Controller: NEMA 4

Installation: Indoors or outdoors

Options: On/Off or modulating humidity control, internal or external bypass, skirts, weatherhoods, pre- and post-air treatment modules can include filtration, cooling and heating.

Typical Energy Consumption:

MODEL SA at nominal moisture removal of 240 lbs/hr at 75°F, 50% RH: 507 lbs/hr of 50 psig steam for reactivation and 32 full load amps at 460 volt for unit power.

Munters Corporation
Dehumidification Division - Industrial
79 Monroe Street
Amesbury, MA 01913
Tel: (978) 241-1100 or (800) 843-5360
Fax: (978) 241-1214
www.munters.us

M162012 Rev.5 10/07
©2007 Munters Corporation
HoneyCombe® is a registered trade name of Munters Corporation



The Humidity Expert