



IceDry® 1400 Desiccant Dehumidifier

Benefits

- Reduced electrical and mechanical failures, less downtime
- Lower maintenance costs
- Reduced defrost requirements
- Increased efficiency of evaporators

IceDry® 1400 Desiccant Dehumidifiers

Dehumidification units for frost free storage

Frost free cold storage can be a reality with the installation of an IceDry dehumidifier. When an IceDry unit is installed, accumulated ice and frost will be significantly reduced or eliminated.

IceDry is the only dehumidifier that has been developed especially for installation inside cold storage areas. The tough, cold environment demands new and special features created to ensure reliable and energy efficient operation of the unit.


Installation of the unit is simple. The IceDry unit is placed close to a wall and ducting around the unit is minimal. Reactivation air is taken from the room next to the cold storage area. Immediately after being started, the unit will begin to reduce the ice and frost.

Unique features of the IceDry unit include:

- Thermostat controlled heating fan within the electrical panel
- Special reactivation fan in an insulated fan box with a heating cable
- Reversible panel construction (provides installation flexibility)

In the 1950's Munters invented modern industrial dehumidification when it introduced the self-regenerating desiccant rotor, the heart of the dehumidifier.

Today, Munters offers rotors with five desiccant formulations and is the acknowledged expert in the integration of rotors into dehumidification systems and air handlers.

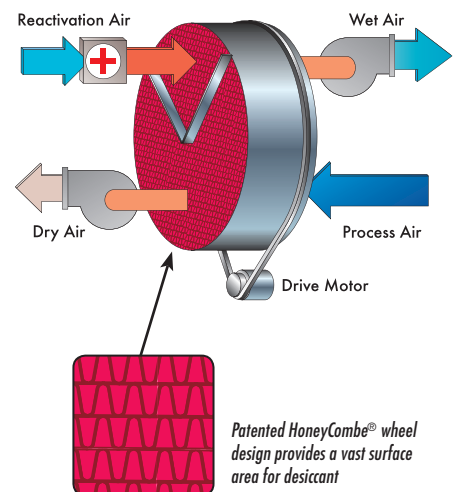

Suggested Specification Guide

Dehumidifier shall be of the non-cycling sorption type with a single desiccant rotary structure. The unit will be equipped with an internally sealed rotor unit. The rotor casing shall be constructed of durable thermoset plastic and contain isolated sections that will provide a precise balance for dehumidification, reactivation, and heat recovery airflows. The metal frame and access panels shall be constructed from corrosion resistant ALUZINK®. Suitable access panel shall allow access for inspection or servicing without disconnecting ducting or electrical wiring.

The rotary structure shall be a monolithic fabricated extended surface consisting of inert silicates reinforced with uniform diameter glass fibers for maximum strength. The fabricated structure shall be smooth and continuous in the direction of airflow without interruptions or sandwich layers which restrict airflow or create a leakage path at joining surfaces. Desiccant shall not channel, cake or fracture due to repeated temperature and moisture cycling. The materials of construction shall be non-toxic and NFPA 225-ASTM E84 compliant.

Full face contact pressure seals shall be provided to separate the process and reactivation air streams and eliminate detrimental leakage of air or moisture with static pressure differentials of up to 3" of water gauge.

Dehumidifier shall be factory assembled, fully automatic, complete with HoneyCombe® desiccant wheel, reactivation heaters, reactivation energy control system, roughing filters, motors, fans, non-ratcheting desiccant drive unit, automatic controller and all components' auxiliaries. Reactivation Energy Modulation shall be stepless solid state proportioning type. Dehumidifier shall be functionally tested at the manufacturer's factory and shipped complete with all components necessary to maintain normal operation.

*Continual engineering and research for product improvement may result in design and specification changes. Consult factory for certified technical data.

Technical Specifications*

Process Volume: 825 scfm

Max Reactivation Volume: 225 scfm

Maximum FLA:

24.4A @ 230V/3/60Hz

13.2A @ 460V/3/60Hz

Max noise level unducted (dBA): 80

30% process and reactivation filters

Fan External Static Pressure (in. w.g.)

Process: 1.0

Reactivation: 0.5

Performance:


For Process inlet temp ≤10°F

Process Outlet Moisture = 0.6 gr/lb

Process Temperature Rise is 16°F

For performance ≥10°F, consult factory.

IceDry® 1400 Schematic

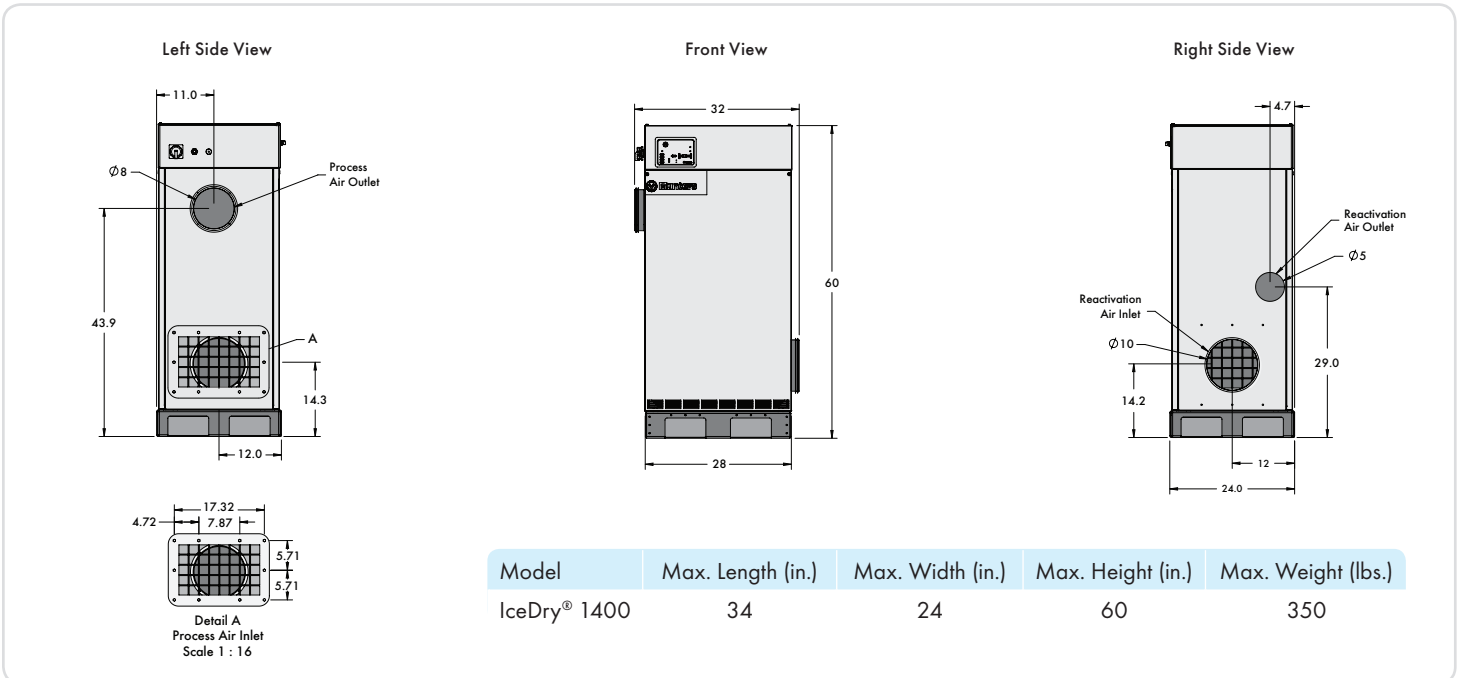

Australia Phone +61 2 8843 1588, dh.info@munters.com.au Austria Phone +43 1 6164298-0, luftentfeuchtung@munters.at Belgium Phone +32 1528 5611, info@muntersbelgium.be Brazil Phone +55 41 3317 5050, munters@com.br Canada Phone +1 905 858 5894, dhinfo@munters.com China Phone +86 10 8041 8000, info@munters.com.cn Czech Republic Phone +420 544 211 434, info@munters-odvlhcovani.cz Denmark Phone +45 4495 3355, info@munters.dk Finland Phone +358 20 776 8230, laitemyynit@munters.fi France Phone +33 1 3411 5757, dh@munters.fr Germany Phone +49 4087 96900, mgd@munters.de India Phone +91 20 668 18 900, info@munters.in Italy Phone +39 0183 52 11, marketing@munters.it Japan Phone +81 3 5970 0021, mkk@munters.co.jp Korea Phone +82 2761 8701, munters@munters.co.kr Mexico Phone +52 722 270 40 49, munters@munters.com.mx Netherlands Phone +31 172 433231, vochtbeheersing@munters.nl Poland Phone +48 58305 3517, dh@munters.pl Singapore Phone +65 6744 6828, info@munters.com.sg South Africa Phone +27 11 997 2000, info@munters.co.za Spain Phone +34 91 640 09 02, marketing@munters.es Sweden Phone +46 8 626 63 00, avfukning@munters.se Switzerland Phone +41 52 343 8886, info.dh@munters.ch Thailand Phone +66 2642 2670, info@munters.co.th Turkey Phone +90 216 548 1444, info@muntersform.com UAE +971 4887 6462, middle.east@munters.com United Kingdom Phone +44 1480 432243, info@munters.co.uk USA Phone +1 978 241 1100, dhinfo@munters.com Vietnam Phone +84 8 8256 838, vietnam@muntersasia.com



Munters Corporation

Tel: (800) 843-5360 E-mail: dhinfo@munters.com
www.munters.com